


**Dicolor** LED **or**

# K SERIES

SMD Led Display

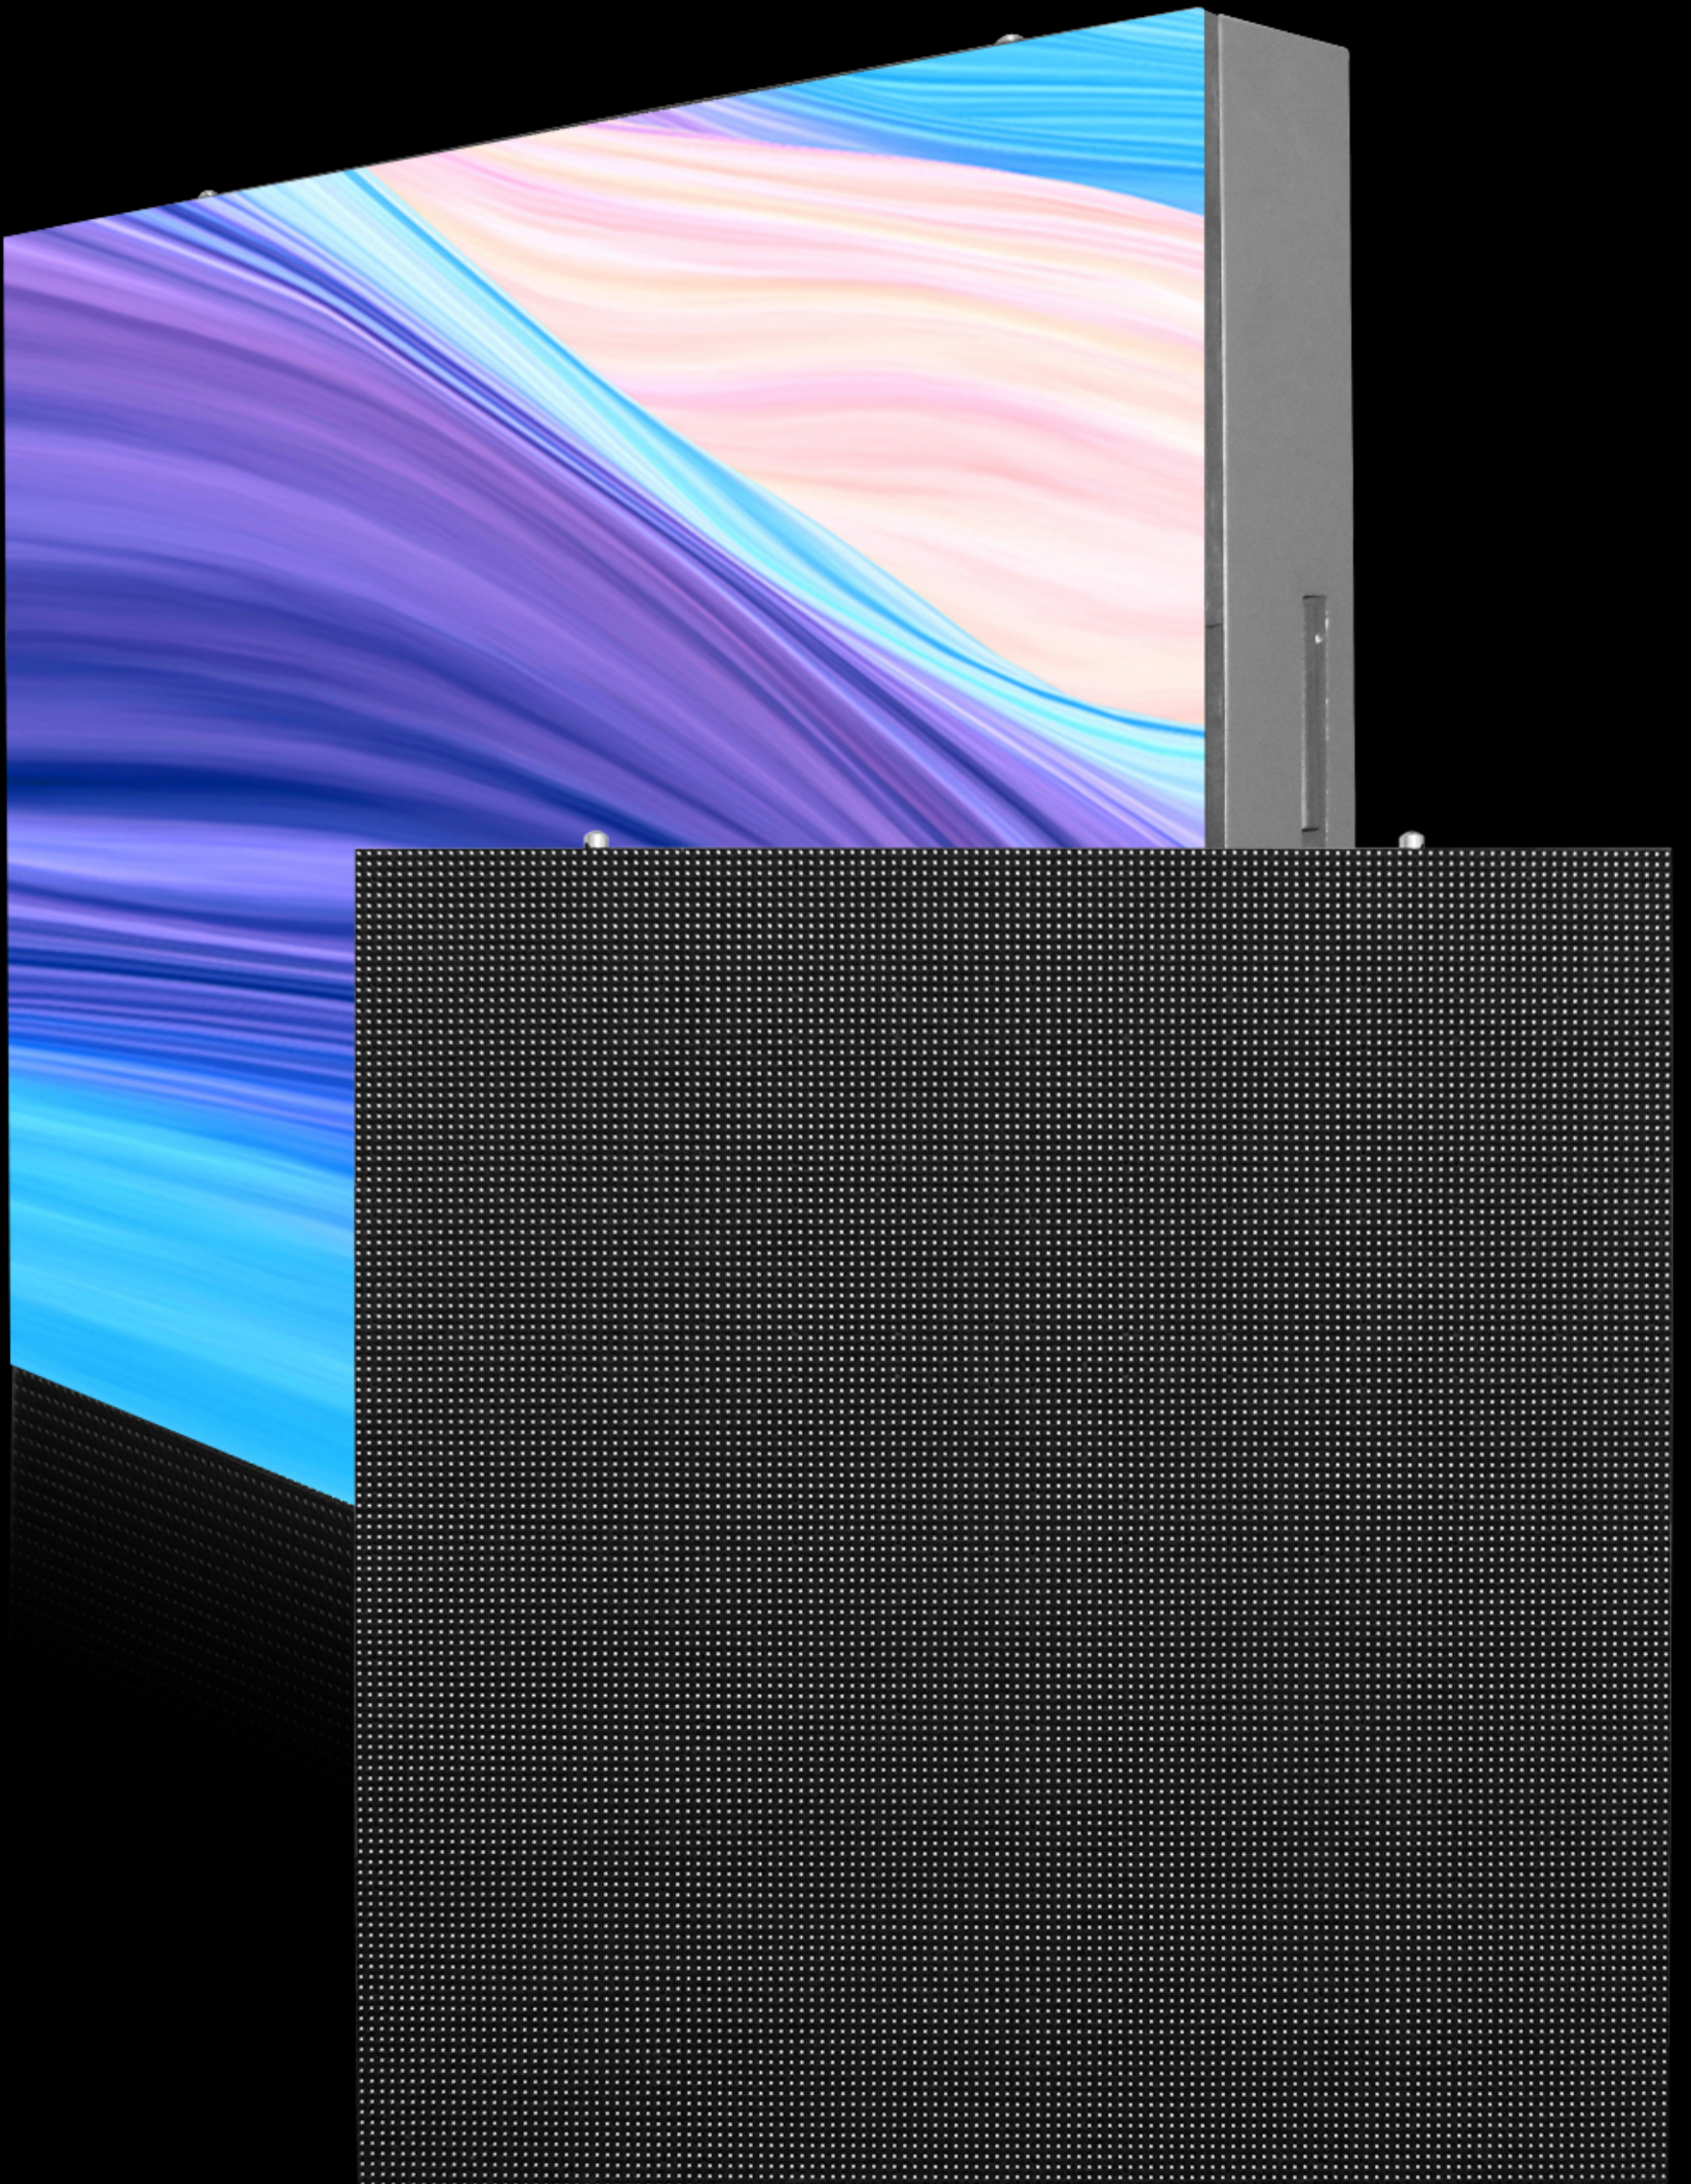

# Product Description

Dicolor K series is popular choice for indoor and outdoor led application, supports seamless right-angle splicing, flexible front/rear installation & maintenance is available, helps customers easily realize unlimited creativity;

Dicolor K series is highly dustproof & waterproof & windproof, used high end material to ensure 100000 hours life span (with 50% brightness).



Seamless  
right-angle splicing



Well heat  
dissipation



Waterproof



Front & Rear  
maintenance




Ultra wide  
viewing angle



Stable and reliable

# Product Appearance

Cabinet size: 640\*480 / 960\*960

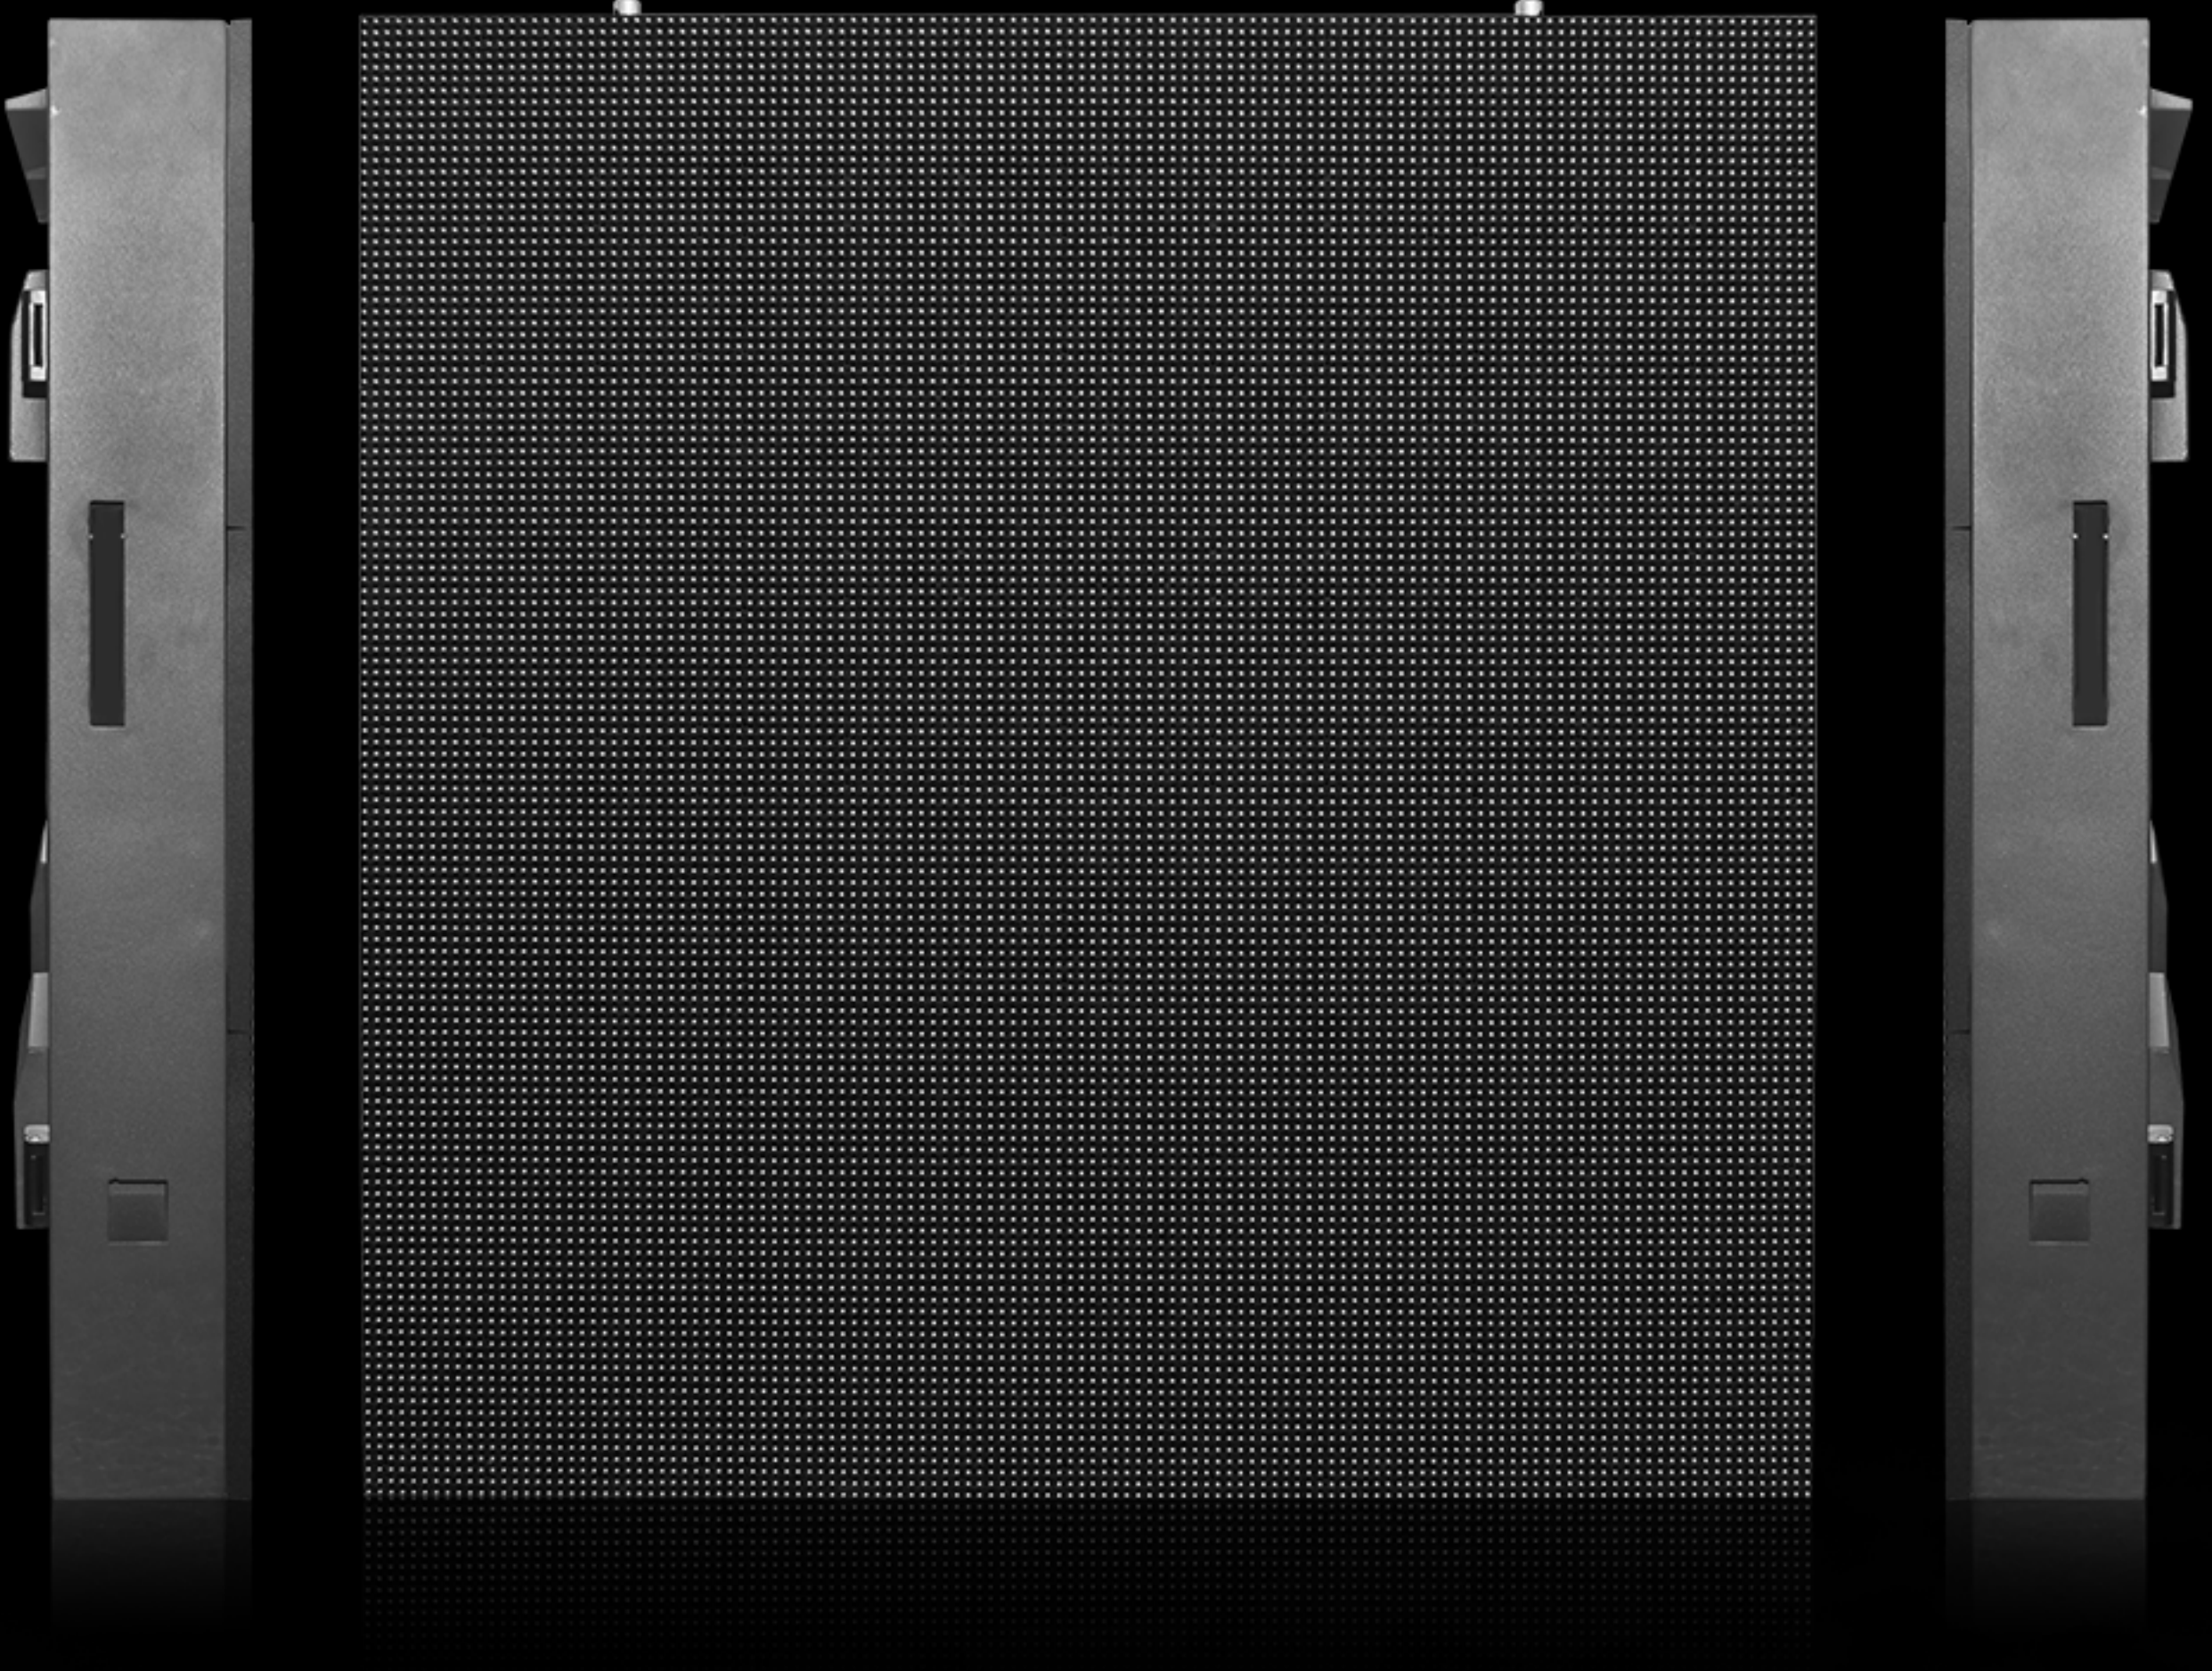

**Mature SMD technology**

passed approval of 10000 + projects

**Covers P1.2-P10**


to meet different scenes

Powerful heat dissipation  
**prolong components' life span**


Multiple waterproof performance  
**as outdoor priority**



**Ultra-wide  
viewing angle**

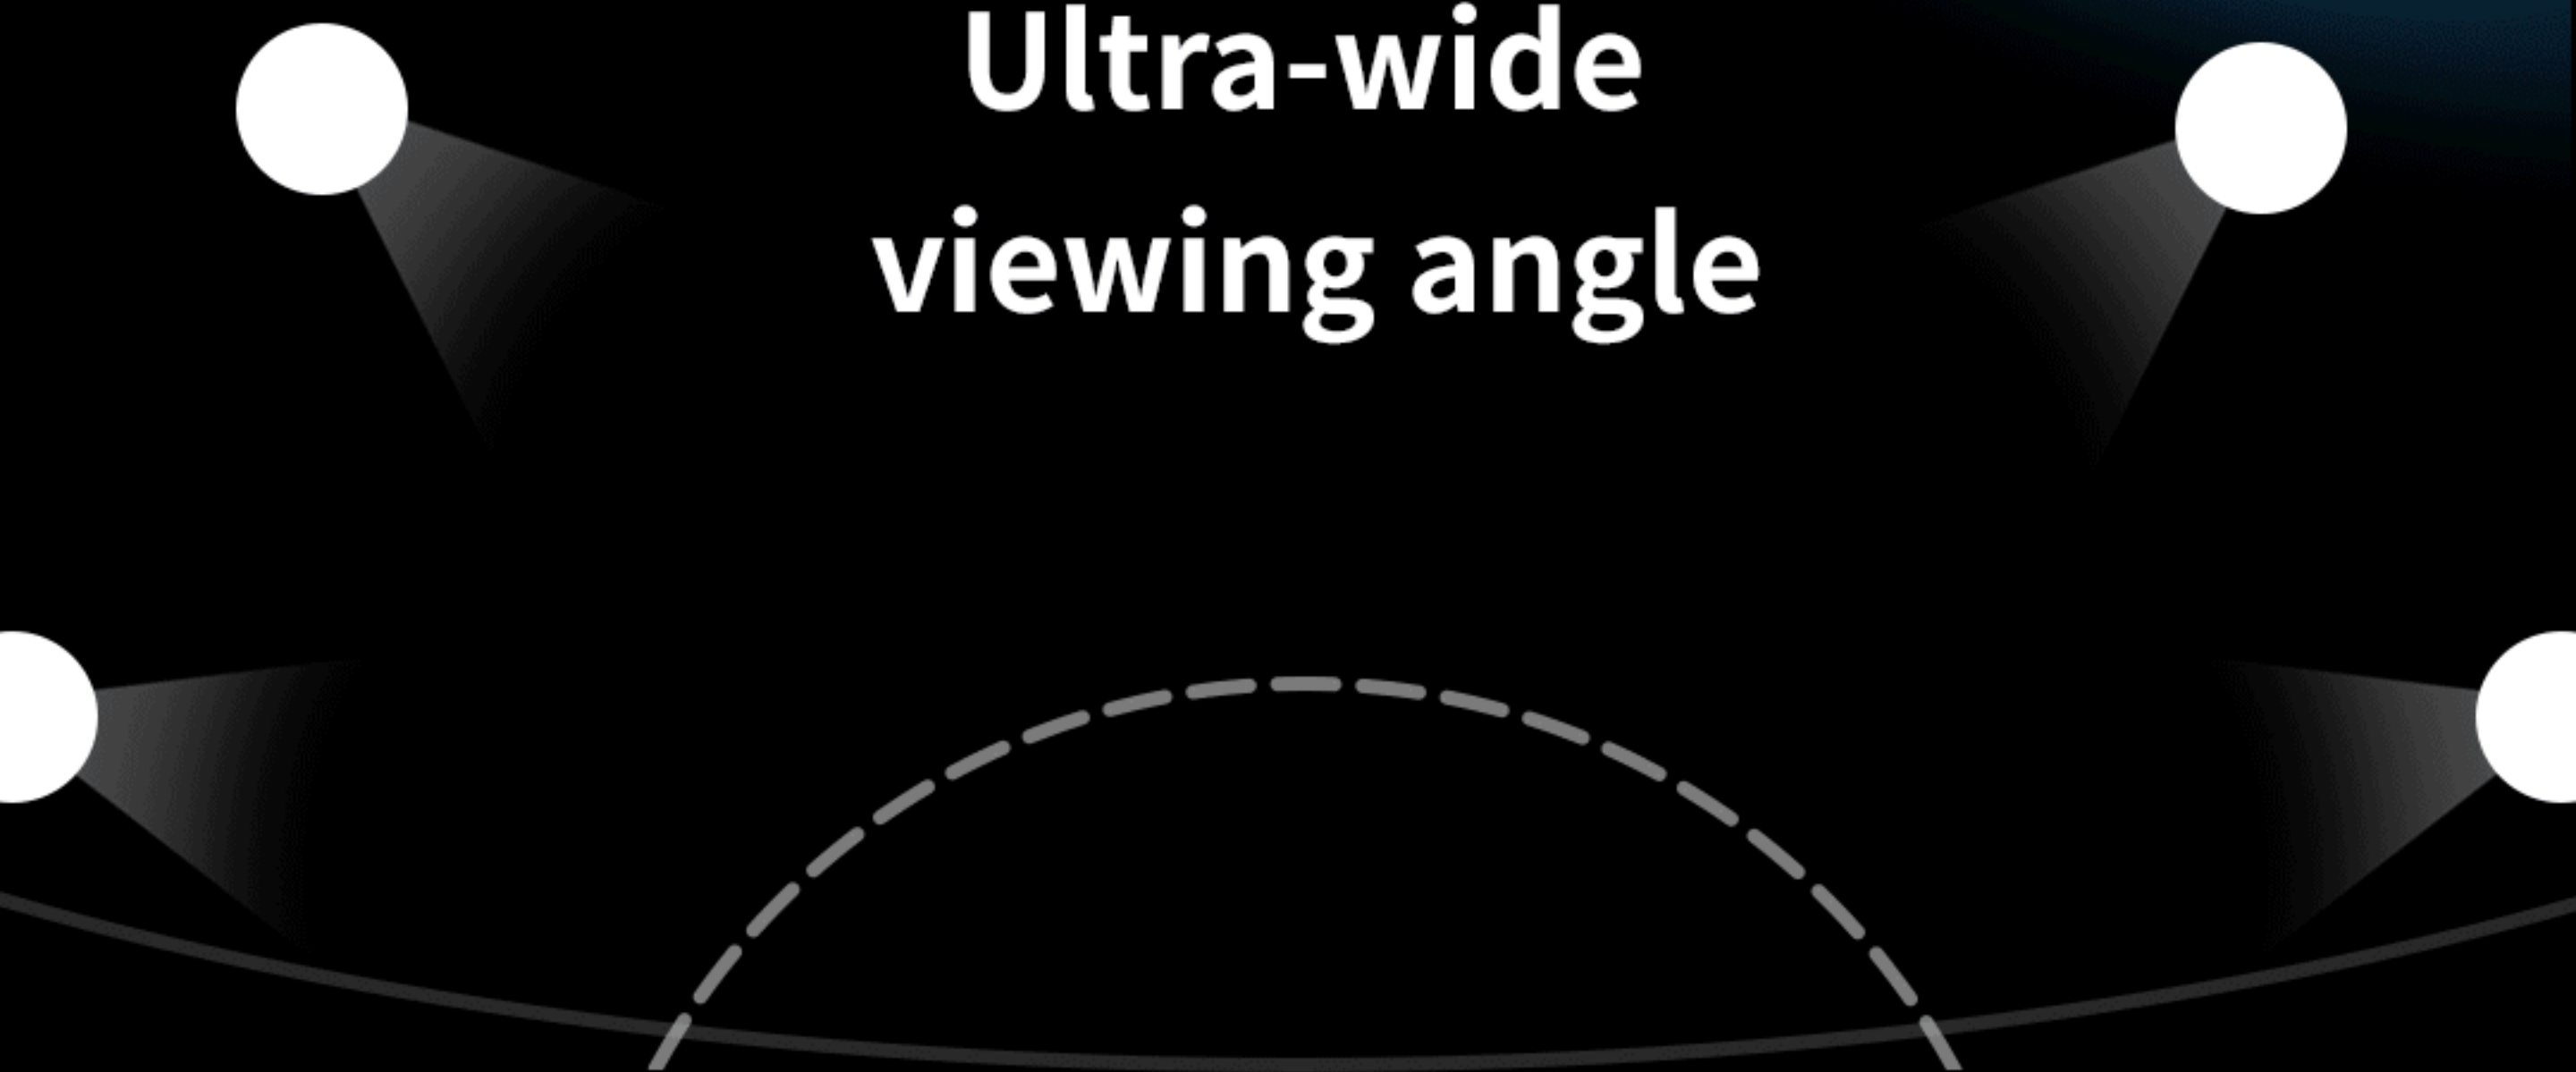

# Quickly front/rear installation to save labor cost

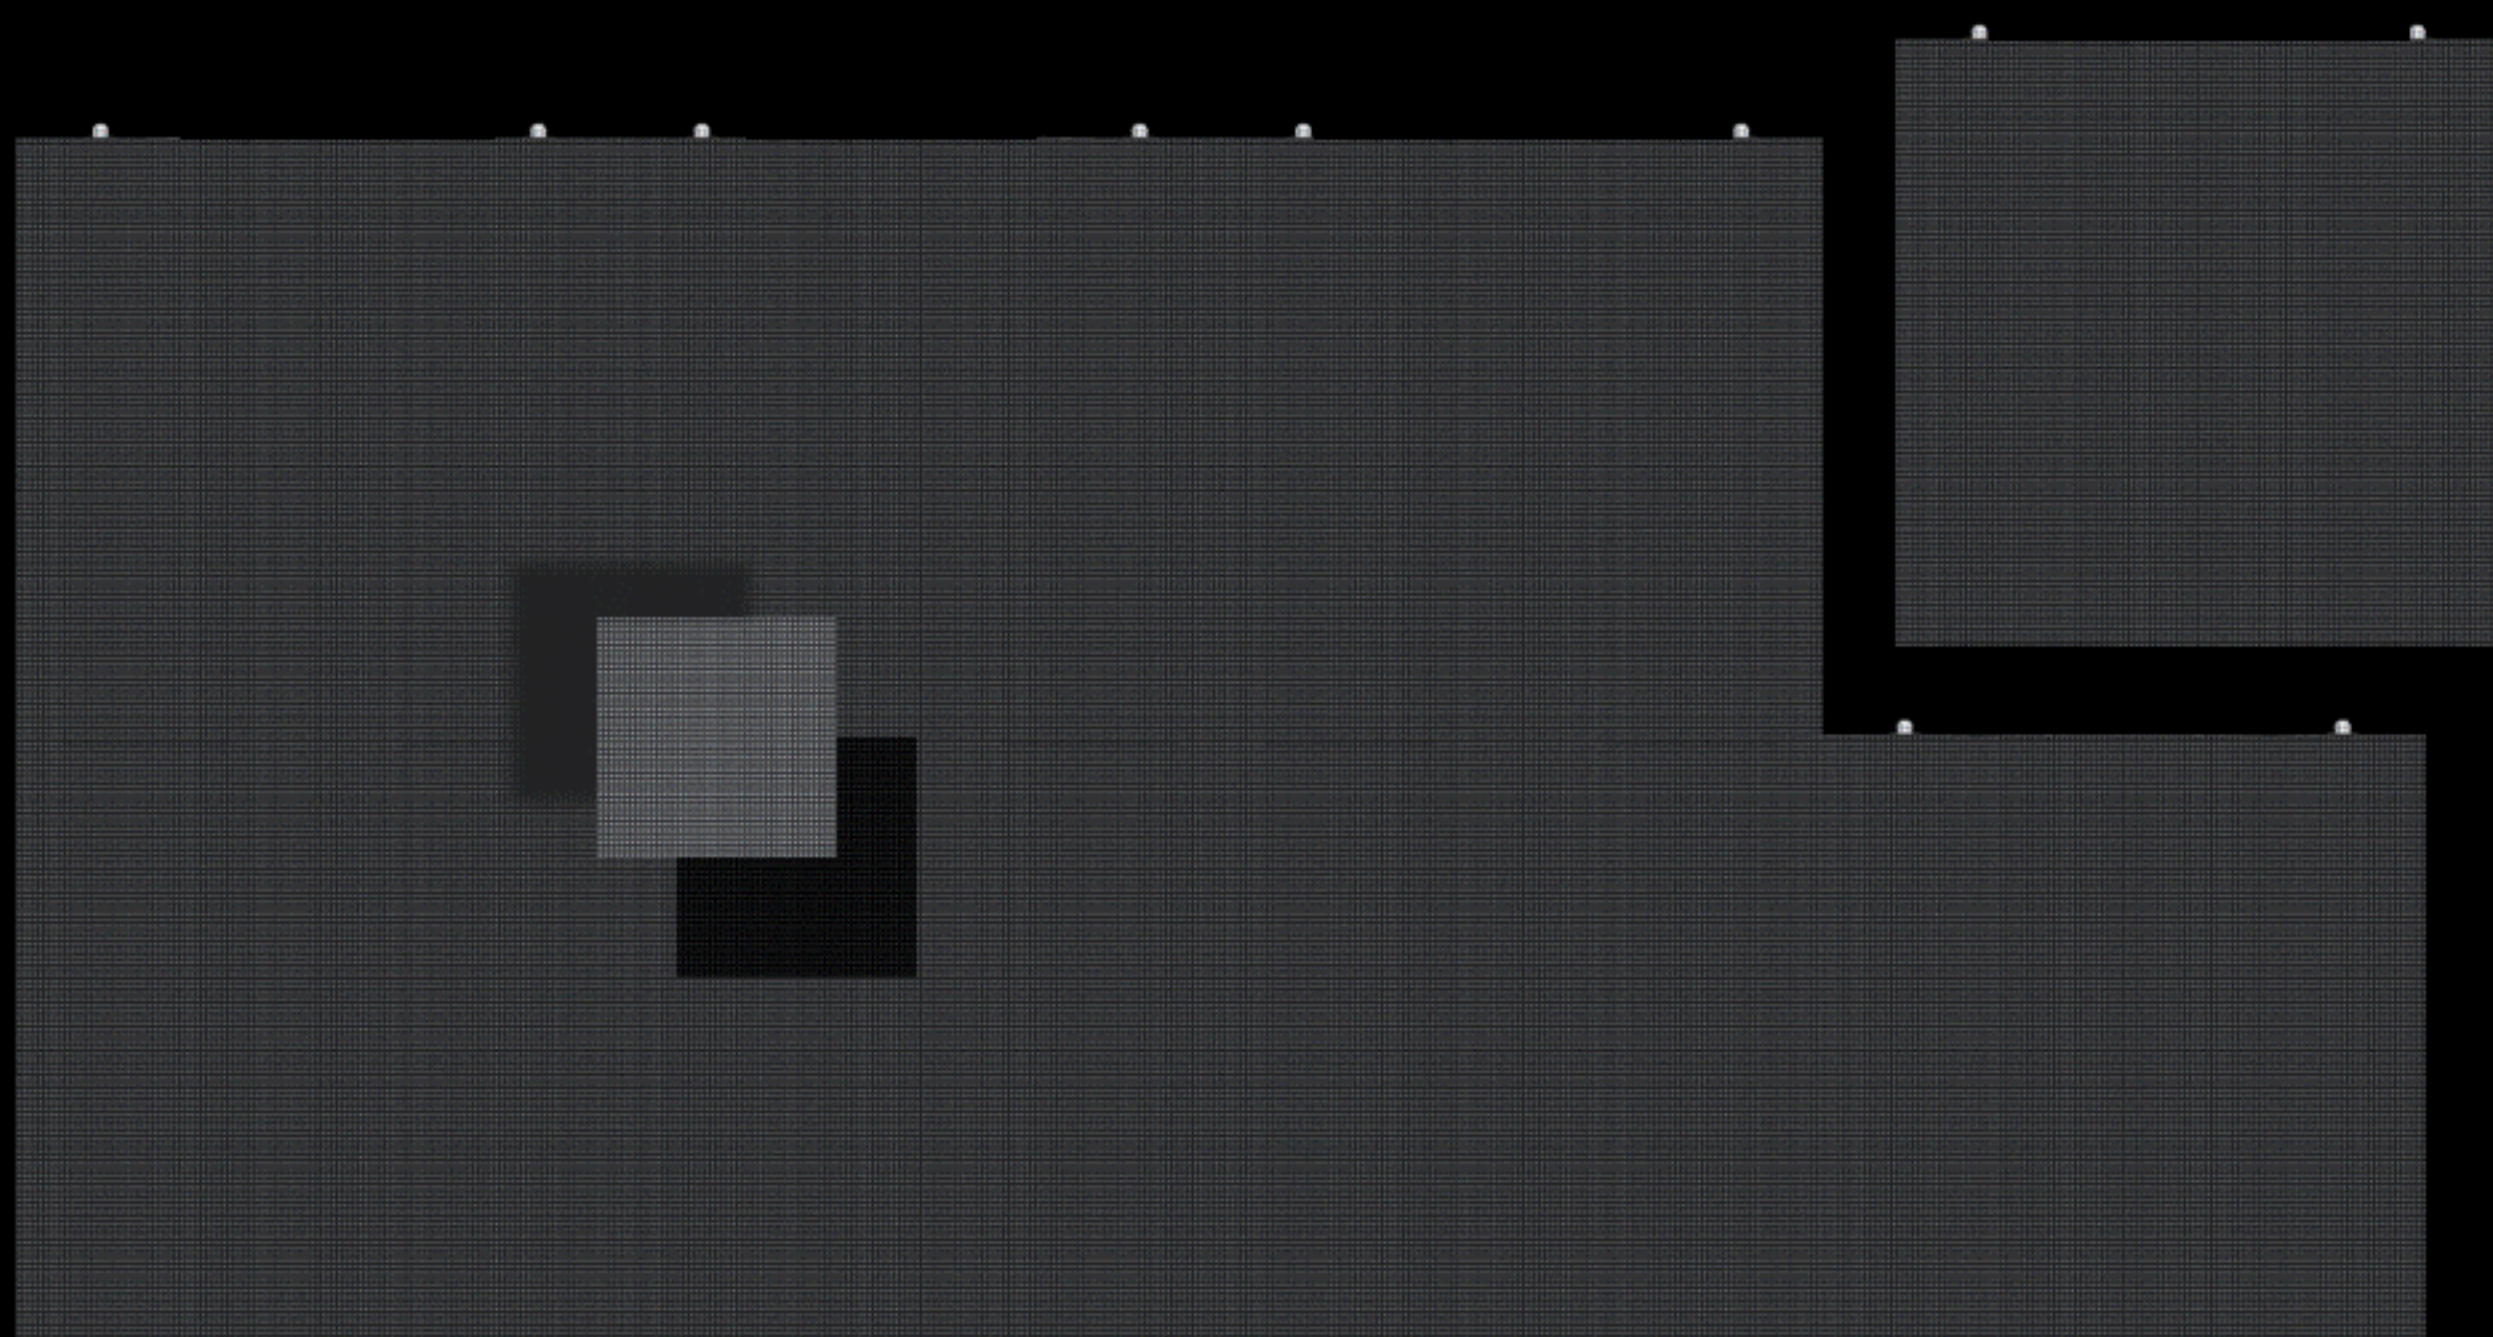

## Application



Landscape



DOOH



Advertising



Signage



Traffic



Sports

# K SERIES

## Product Parameter

### Indoor

Model	K-121	K-151	K-181	K-201	K-251	K-301	K-401
Pixel Pitch (mm)	1.25	1.538	1.86	2.0	2.5	3.076	4.0
Cabinet size (WxH/mm)	640*480						
Cabinet resolution	512*384	416*312	344*258	320*240	256*192	208*156	160*120
Brightness (Nits)	600			800			
Grey scale (Bit)	14						
Refresh rate (Hz)	3840			1920			
Max/Ave. Power Consumption (W/m <sup>2</sup> )	684/228	594/198	510/170	540/180	510/170	450/150	450/150
IP Rating	IP40/IP21						

### Outdoors

Model	K-250	K-300	K-400	K-500	K-660	K-800	K-100
Pixel Pitch (mm)	2.5	3.0	4.0	5.0	6.67	8.0	10.0
Cabinet size (WxH/mm)	960*960						
Cabinet resolution	384*384	320*320	240*240	192*192	144*144	120*120	96*96
Brightness (Nits)	4500		5000	5500			
Grey scale (Bit)	14						
Refresh rate (Hz)	1920						
Max/Ave. Power Consumption (W/m <sup>2</sup> )	1000/350						
IP Rating	IP65/IP54						



**Dicolor** LED

### Shenzhen Dicolor Optoelectronics Co.,Ltd.

Address: No.13 Huiye Road, Tangjia Community, Fenghuang Street, Guangming District, Shenzhen, China

Tel: +86-755-29592940 Fax: -86-755-29604042

E-mail: inquiry@dicolor.cn Website: www.dicolor.cn



400-6645-658